

VENSTAR®



SLIMLINE PLATINUM

COMMERCIAL PROGRAMMABLE THERMOSTAT SERIES



4.8" w x 4.3" h x 1.1" d

STANDARD FEATURES

- Up to 3 configurable outputs for maximum flexibility
- Heat pump compatible
- Backlit, color-coded keys and legends
- Large, easy to read backlit display
- Configurable programmable or non-programmable
- Configurable manual or auto changeover
- LED indicator glows green or red to indicate cooling or heating
- Service filter and UV light indicators
- Fahrenheit or Celsius display
- Non-volatile memory
- Keypad lock
- Accepts the IR Remote Control Accessory
- Accepts the Humidity Module Accessory
- Accepts the EZ Programmer Accessory
- Accepts the Comfort Call Telephone Accessory

Wallplates, sensors & lock ring available



MODELS:
T2700, T2800 & T2900

MODEL T2700

All of the standard features plus:

- All of the standard features
- Non-programmable with smart fan
- 2-Heat/2-Cool
- Controls to, or monitors a 2nd sensor
- Set point limiting
- Random start
- Accepts humidity module
- Up to 4 hours override

MODEL T2800

All of T2700 features plus:


- 7-day programmable with smart fan
- Up to 3 heat, 2 cool
- Up to 3-occupied periods per day
- Hi/Low outdoor temps of the day
- Energy Save
- Holiday mode

MODEL T2900

All of T2800 features plus:

- Light activated
- Programmable output
- Economizer control
- Can average with up to 8 remote sensors
- Reheat capable
- Pre-occupancy fan purge
- Energy Watch

Venstar Programmable Thermostat T2900

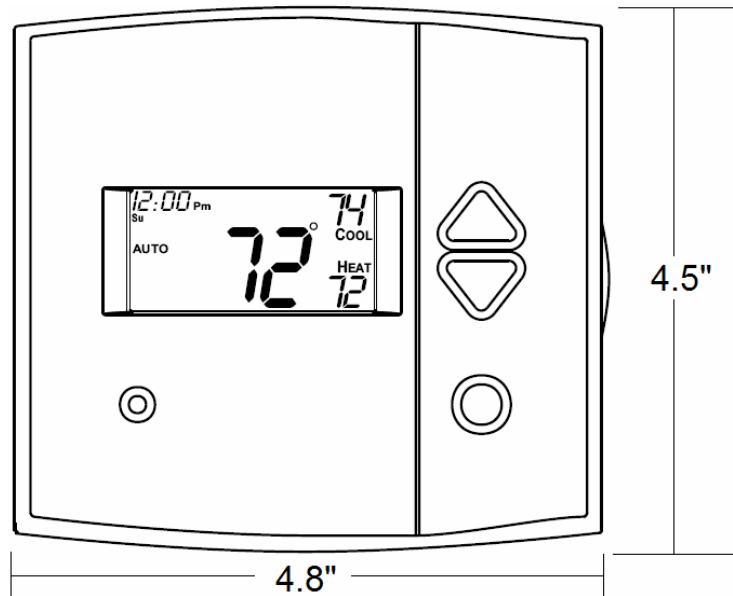

STANDARD FEATURES:

- Up to 3-Occupied, 1-Unoccupied periods per day, with copy command for easy programming
- Light Activated occupied period (defeatable)
- Accepts humidification/dehumidification control module (Venstar part number ACC0430)
- Auto changeover, 3-stage heat, 2-stage cool for use with gas/electric, heat pump, electric & hydronic heat
- Configurable for manual changeover, also configurable programmable or non-programmable
- Adjustable deadbands and timers
- Control to, or monitor a second remote sensor
- Can average up to 8 (wired or wireless) remote sensors
- 3 configurable outputs for maximum flexibility (MISC1, MISC2, MISC3)
- Extra 6th and 7th outputs (beyond our standard thermostat)
- Programmable output (control by time, temperature or internet/phone control)
- Energy Watch keeps Track of energy use by tracking heating and cooling hours
- Smart Fan (keeps the fan from running during unoccupied periods)
- Smart recovery
- Pre-occupancy fan purge
- Display shows both heating an cooling setpoints and room temperature simultaneously
- All programming and setpoints stored in non-volatile memory, and are never lost in power failure
- Service filter and service UV lamp indicators
- Red/Green LED shows whether thermostat is calling for heating or cooling
- 5-minute compressor time guard and adjustable cycle limit, both defeatable for servicing equipment
- Outdoor sensor ready with high and low temperature of the day
- Thermoglow backlit electro-luminous display and backlit color coded keys and legends
- Accepts accessory IR Remote Control system (Venstar part number ACC0431)
- Accepts accessory EZ Programmer (Venstar part number ACC0432)
- For accessory locking cover use (Venstar part number ACC0620)

MODEL:	T2900	QUANTITY:		DATE:		
JOB NAME:						
LOCATION:						
BUYER:				BUYER P.O.#:		
ENGINEER:						